
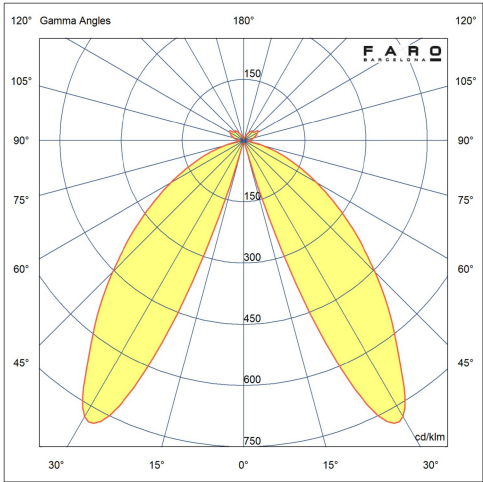


IK06 IP55



Mounting	Floor, Post, Wall
Voltage (V)	100V-277V
Hertz	50/60Hz
Class	II
IP	55
IK	06
Power (W)	6,5
Energy class light source	E
Light source	SMD LED
Light source included	Yes
Power factor	0.9
Luminous Flux (lm)	68
Color temperature (K)	2700K
CRI	≥80
Suitable for seaside areas	Yes
Driver included	Yes
Supply current	200 mA
Structure material	Concrete
Diffuser material	Glass
Structure finish	Concrete
Included Accessory	KIT DE FIJACION
Other functionalities	Includes IP68 connector

Installation instructions

Energy label

Photometric



